



LED HIGH BAY 2

Fitzgerald^{FL}


Lighting your world



120° - Default



90° - 90D Suffix




50° - 50D Suffix

| Order Code | Lumens | LED Wattage | Circuit Wattage | Reflector Angle(degrees) |
|--------------------|--------|-------------|-----------------|--------------------------|
| LHB2/98/AD/850/50 | 13,300 | 98 | 105 | 50 |
| LHB2/140/AD/850/50 | 19,700 | 140 | 150 | 50 |
| LHB2/185/AD/850/50 | 25,900 | 185 | 200 | 50 |
| LHB2/98/AD/850/90 | 13,400 | 98 | 105 | 90 |
| LHB2/140/AD/850/90 | 19,900 | 140 | 150 | 90 |
| LHB2/185/AD/850/90 | 25,900 | 185 | 200 | 90 |
| LHB2/98/AD/850 | 13,200 | 98 | 105 | 120 |
| LHB2/140/AD/850 | 20,000 | 140 | 150 | 120 |
| LHB2/185/AD/850 | 26,500 | 185 | 200 | 120 |

IP Rating IP65
 IK Rating IK10
 Ambient Temperature Range -40C < Ta < +40C

Wiring Connections

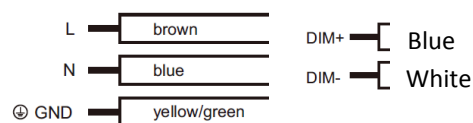

Disconnect DIM+ and DIM- for full power operation.

