

PRODUCT DATA SHEET

LED GRAFIA
HAZARDOUS
LUMINAIRE

www.fitzlight.co.uk

01208 79524

Fitzgerald Lighting, 38 Normandy Way, Bodmin, Cornwall, UK PL31 1EX

Fitzgerald 

LED GRAFIA

HAZARDOUS LUMINAIRE

Fitzgerald^{FL}
www.fitzlight.co.uk

Designed to work in harsh environments the LED Grafia is a general purpose zone 1 ATEX category 2 flameproof floodlight.

**Zone
1, 2, 21
and 22**


**FIVE YEAR
WARRANTY**



Label Marking	Ex eb mb op is IIC Gb T4 Ex tc op is T86°C IIIB Dc
Zoned areas	Zones 1, 2, 21 and 22
Ambient range (max)	-40°C to +55°C
Materials	Anodised corrosion resistant aluminium body with high impact polycarbonate diffuser
Cable entries	2 x M20/M25
Electrical connections	3 wire and earth cable size 4mm ²
Supply voltage	220-240V AC, 50/60Hz
Control gear	Intergral with the luminaire
Weight	11Kg
Certificate No.s	CML 17ATEX3027X IECEX CML 17.0018X

Product Features:

- Low maintenance high efficiency led LED light source
- Class leading light output
- Virtually maintenance free
- Long service life
- Steel swivel mounting bracket
- Captive diffuser with isolation switch for safe installation and maintenance

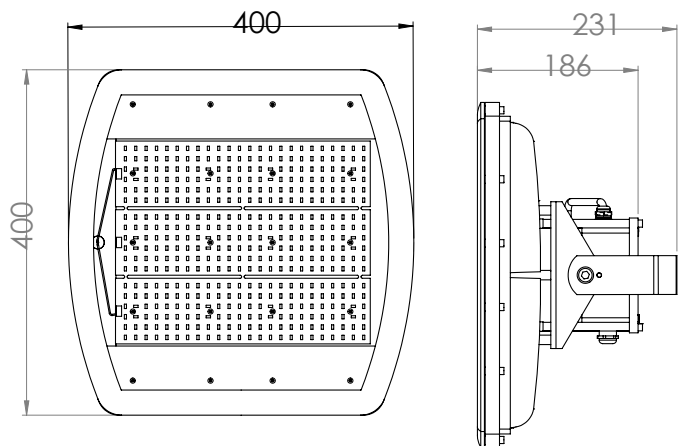

Order Codes

LED Grafia	Watts	Lumens	Length	Width	Depth
GRA 150/CO/Z1/970	150	19000	400	400	231
GRA 150/CO/Z2/840	150	24000	400	400	231